




- X 25 Year System Warranty
- X Supports Gigabit Ethernet
- X Standard Euromod Size

Features

- 25 Year System Warranty
- Standard Euromod Size
- Backward Compatible
- Integral Cable Tie Position
- Supports Gigabit Ethernet
- Category 6
- Built in Slide Label System
- LSA Style Termination Blocks

Product Overview

Excel Category 6 UTP modules are standard 6C size. Each shuttered module is supplied with a slide label field. Termination can be made using LSA compatible tooling, a cable tie base is positioned between the IDC blocks to relieve cable stress. The module is cased in a high quality ABS plastic and is suitable for mounting in a variety of plates and housings. The low profile design and 6c sizing makes this item ideal for floor box installations.

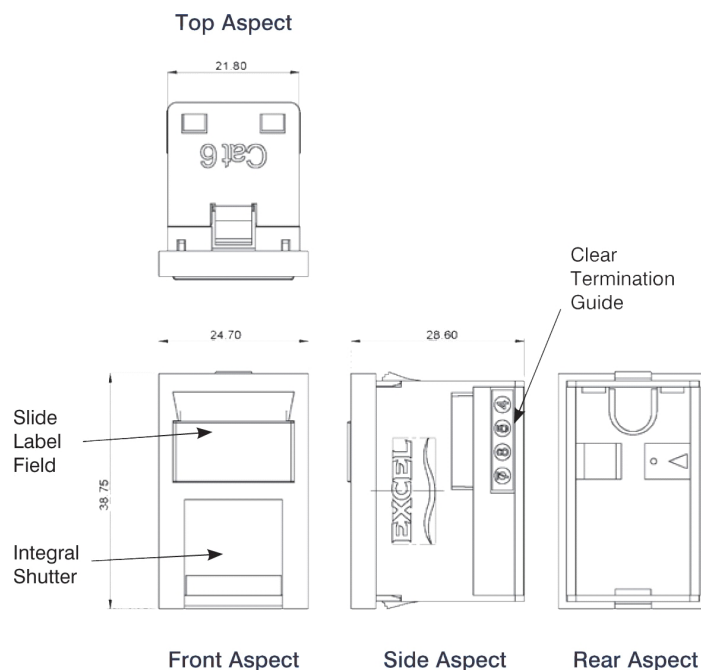

Performance Overview

Excel Category 6 data outlets are manufactured and tested to the Category 6 performance standards. A range of performance characteristics are tested up to 250MHz including return loss, attenuation and near and far end crosstalk (NEXT and FEXT) for which both worst case and power sum tests are completed. Actual performance far exceeds the required standard - when tested in isolation and in circuit - resulting in significant headroom for even the most demanding of applications.

As well as providing link and channel compliance - when installed with Excel category 6 components - with the aforementioned specification - the outlet is also backward compatible with Category 5 and 5e components.

Performance / Specification Table

| | |
|------------------------------|--|
| Specification: | Category 6 |
| Wiring Specification: | T568A & T568B |
| Dimensions: | 24.7mm wide x 38.75mm high x 28.6mm deep |
| Installation Recommendation | Suits snap flat/angle mounting plate or minimum of 27mm back boxes when installed with beveled faceplate |
| RJ45 Jack: | Min. life 750 insertions |
| RJ45 Jack: | 50 Micro-inch Gold Plated contact pins |
| SIP Housing: | ABS 80% + AS 20% High-Impact UL94HB |
| Jack Housing: | PPBT High-Impact UL94V-0 Thermoplastic, 30% Glass Fibre Filled |
| Shutter: | ABS 80% + AS 20% High-Impact UL94HB |
| IDC Plastic: | Polycarbonate Resin High-Impact UL94V-0 Thermoplastic |
| IDC Contacts: | Suitable for LSA compatible tooling. Maximum 200 reterminations |
| IDC Compatibility: | 22 to 26AWG Solid / 24AWG Stranded wire |
| NEXT at 250MHz | Category 6 42.4dB @250MHz (Power Sum) |
| FEXT at 250MHz | Category 6 30.5dB @250MHz (Power Sum) |
| Operating Temperature Range: | -10°C to 60°C |
| Storage Temperature Range | -40°C to 68°C |
| Humidity: | 10 - 90% Relative Humidity |

Typical Applications

- 10Base-T Ethernet
- Composite Video
- 622 Mbps ATM
- 100BASE-TX Fast Ethernet
- Token Ring
- 1000 Base-TX Gigabit Ethernet
- 155 Mbps ATM

Part Number Information

| Part No. | Description |
|----------|---|
| 100-301 | Category 6 Unscreened RJ45 Module - 6c, White |

System Warranty

The Excel System Warranty provides a 25-year product and applications assurance of compliance with the industry performance standard appropriate to the class of cabling installed. The warranty may be applied for by an accredited Excel Partner who has designed, supplied and installed the said system.



Excel is a world-class premium performing end-to-end infrastructure solution - designed, manufactured, supported and delivered - without compromise.

Contact us at sales@excel-networking.com

