

Excel Optical Fibre Patch Panel - Sliding Drawer - ST Style Multimode/Singlemode



X Multimode and Singlemode

X Sliding Drawer Design

X Choice of Port Density

X Management and Fixing Kit Included

Features

- Multimode and Singlemode
- Choice of Port Density
- 1U rack space design
- Adjustable fixing arms included
- Multiple cable entry to rear
- Sliding Drawer Design
- Management and Fixing Kit Included
- Upto 24 duplex adaptors per patch panel
- Port identification numbers
- 25 Year System Warranty

Product Overview

The Excel range of ST patch panels are sliding drawer 'tray style' housings suitable for either direct termination or splicing of upto 24 fibres in 1U of rack space. Each panel is manufactured from high quality 2mm thick steel and finished in Black powder coated paint to provide a strong and durable unit. To the front of the patch panel the specified number of simplex adaptors are loaded from left to right. The fascia also houses the release latches for the sliding drawer. Each adaptor is fitted with a colour coded dust cap, Black for multimode, Red for singlemode. Each simplex adaptor accommodates one terminated fibre. Each panel has included within it a set of adjustable fixing arms, and a cable management pack which includes cable entry glands, cable ties, and a 24 way splice bridge.




A. Sliding drawer design



B. Panels are available part or fully loaded



C. Adjustable fixing arms, clear port and panel labelling

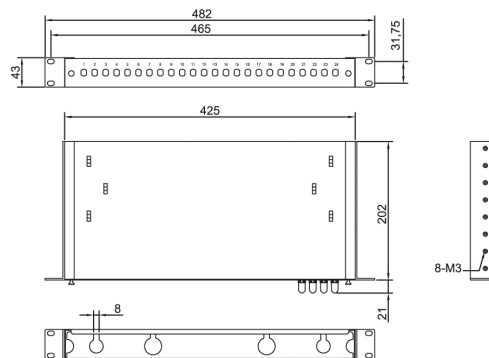

D. Product dimensions, front, plan and rear view and fixing arms, shown in mm

Accessories Included

Item	Quantity
Cable gland (PG 13.5)	1
Cable gland (PG 19)	1
Nylon cable tie	10
Adjustable cable tie	6
12 Position splice holder	2
Label holder (210 x 9.2 mm)	2
Mounting twist tie	6
Blanking plug (RSB-19)	2
Blanking plug (RSB-25)	3
Cage nut and screw rack mounting kit	1 pack

Product Specification

Patch Panel		ROHS Compliant Adaptor	
Width (inc fixing arms)	482 mm	Multimode Insertion Loss	0.2dB Maximum
Depth	202mm	Singlemode Insertion Loss	0.3dB Maximum
Height	43mm	Durability	Min Life 500 Insertions
Colour	Black RAL9005	Multimode Adaptor Wavelength	850 to 1300nm
Operating Temperature	-25 to +40 °C	Singlemode Adaptor Wavelength	1310 to 1550nm
		Operating Temperature	-40 to +80 °C

Part Number Information

Part No.	Description
200-377	Fibre Optic Patch Panel ST Multimode, 4 Fibres
200-378	Fibre Optic Patch Panel ST Multimode, 8 Fibres
200-379	Fibre Optic Patch Panel ST Multimode, 12 Fibres
200-382	Fibre Optic Patch Panel ST Multimode, 16 Fibres
200-384	Fibre Optic Patch Panel ST Multimode, 24 Fibres

Part Number Information

Part No.	Description
200-427	Fibre Optic Patch Panel ST Singlemode, 4 Fibres
200-428	Fibre Optic Patch Panel ST Singlemode, 8 Fibres
200-429	Fibre Optic Patch Panel ST Singlemode, 12 Fibres
200-430	Fibre Optic Patch Panel ST Singlemode, 16 Fibres
200-431	Fibre Optic Patch Panel ST Singlemode, 24 Fibres

System Warranty

The Excel System Warranty provides a 25-year product and applications assurance of compliance with the industry performance standard appropriate to the class of cabling installed. The warranty may be applied for by an accredited Excel Partner who has designed, supplied and installed the said system.



Excel is a world-class premium performing end-to-end infrastructure solution - designed, manufactured, supported and delivered - without compromise.

Contact us at sales@excel-networking.com

